



Installation

Model specific instructions

For:

- [Ducati Hypermotard 821](#)
- [Ducati Hypermotard 939](#)
- [Ducati Hypermotard 950](#)
- [Ducati Hyperstrada 821](#)
- [Ducati Hyperstrada 939](#)

These instructions are a model specific add-on to the general BoosterPlug installation instructions.

The general BoosterPlug installation instructions can be found in the "Downloads" section on the [BoosterPlug.com](http://www.boosterplug.com) website:

<http://www.boosterplug.com/shop/cms-downloads.html>


Installation Tips

- The pictures below should help you locate the AIT sensor where the BoosterPlug is installed.
- Install the BoosterPlug module as per the general installation papers.
 - On the Hypermotard and Hyperstrada 821/939 bikes, the AIT sensor is behind the head light on the left hand side of the bike.
 - For the Hypermotard and Hyperstrada 821/939, the metal sensor on the BoosterPlug is already in the right spot, so you just need to secure it with a zip-tie to prevent it from flopping around.
 - On the Hypermotard 950, the AIT sensor is located in the top of the plastic air filter box.
 - You have several choices for the BoosterPlug sensor location, but our favorite places are near the steering head, under the head light, or next to the airbox snorkel air intake hole. • Just stick to the simple rules in the general installation instructions for placing the external sensor, and you'll be fine.

Pictures

For:

- [Ducati Hypermotard 821 and 939](#)
- [Ducati Hyperstrada 821 and 939](#)

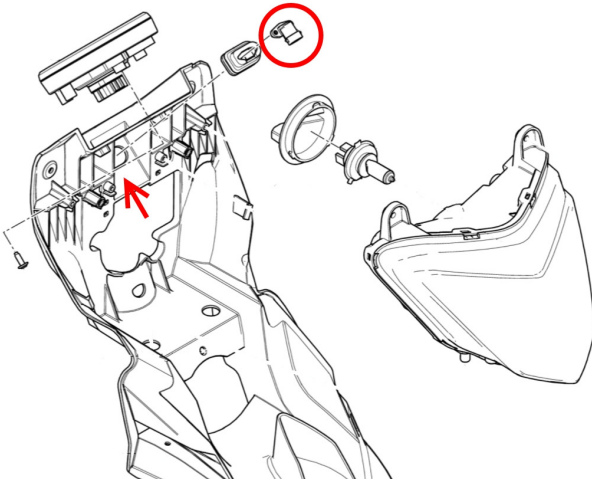

For:

- [Ducati Hypermotard 950](#)

